



**MACH 4 R**



*Our aim is the same as always:  
to make the most beautiful tractor in world!*

A handwritten signature in black ink, appearing to read "Antonio Carraro", with a long horizontal stroke extending to the right.

# When I was a child...

i was so excited every time I saw a tractor. My grandfather owned an Antonio Carraro and watching it, I dreamed of having one, too. When I was only a child I daydreamed about the future of my life: the only certainty was that i would not have had a boring existence. I imagined an interesting job, my own family. A nice home, a car.

Maybe a motorcycle and a tractor. One day I opened my heart and bought an Antonio Carraro. I owed it to myself...and to my grandfather.



*tieme*



**ERGIT**



# R SERIES


The ultimate specialists

There are farmers who work in extreme situations: inaccessible hillsides, rough terrain, narrow orchard rows, sweltering greenhouses. And the MACH 4 are their ideal tractor.



In over 110 years of activity, Antonio Carraro has developed vehicles for specialised agriculture that have radically changed the working methods used in orchards and on hillsides.

Right from its launch, the Ergit 100 Series represented a new concept of tractor, designed specifically for farmers working in extreme conditions. It combines high-level performance with a functional design, all contained within compact dimensions. With the R series, Antonio Carraro takes another leap forward, updating its engines to the highest technological standards, while also improving the comfort of the driving position and the ergonomic design of the controls, bringing them up to the level of an open field tractor. All this while maintaining the compact dimensions that characterise the range and the tough good looks typical of this thoroughbred Italian marque.





# MACH 4:

## the superior quadtrack

Mach 4 is a reversible articulated quadtrack delivering a power output of 74,2 HP. An outsider by definition, with four independent rubber tracks, it offers all the benefits (without the limitations) of both a wheeled tractor and a traditional tracked vehicle. The outstanding traction and stability of the Mach 4 make for increased operating autonomy. The Mach 4 is approved for use on public roads and can be fitted with an Air cab.

Antonio Carraro offers the quadtrack in a distinctive black livery, complete with a series of accessories that enhance the bold design that combines elegance with strength.





# MULTIFUNCTIONALITY: the articulated tracked vehicle

Mach 4 is a universal vehicle suitable for working according to prearranged deadlines in specialised crops, vineyards, orchards or nurseries, on flat or sloping terrain, even in extreme ground conditions (slippery, muddy, flooded, sticky or snowy).

Its extraordinary agility and manoeuvrability in small spaces results from its configuration, featuring identical rubber tracks, and its articulated chassis. The reversible driving system makes it possible to change position and use, allowing a wide variety of towed and pushed equipment to be used.







# ACTIO™ :

## the exclusive chassis by Antonio Carraro

**ACTIO™**, the AC Full Chassis with Oscillation, consisting of a solid cast-iron frame fixed to the axles and housing the tractor transmission, has a central pivot allowing longitudinal oscillation of up to 15 degrees. The two halves of the tractor follow the contour of the terrain independently, assuring stability and traction at all times.

The constant adherence of the rubber tracks to the ground allows engine power to be entirely transferred to the ground, thus increasing performance and safety. With the ACTIO™ chassis, the engine overhangs the frame to achieve a low centre of gravity and a weight distribution of 60% on the front axle and 40% on the rear. However, when an implement is attached to the rear linkage, the weight is distributed equally, with 50% on each axle.



# ACTIO



Thanks to the 45° offset of the front and rear axle final drives, the Mach 4 combines a long wheelbase with a reduced engine overhang: features which grant perfect stability in all operations, ensuring maximum safety and comfort at all times.


The longitudinal oscillation of each track (+8°-11°), together with the oscillation of the ACTIO™ chassis provide constant grip, even over the roughest terrain.



## PLUS

- + **Stability:** low centre of gravity
- + **Comfort:** driving position centred over chassis pivot point
- + **Manoeuvrability:** reduced turning radius
- + **Grip:** equal weight distribution

### TRADITIONAL TRACKED VEHICLE

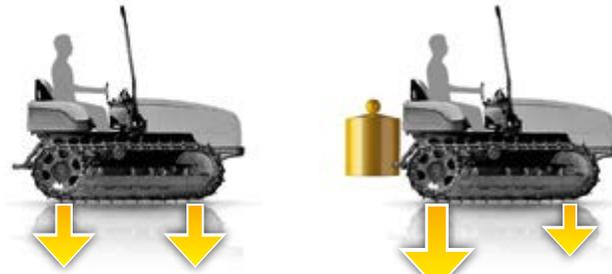

50% 50% 60% 40%

### MACH 4



40% 60% 50% 50%





# RGS™ :

## the two-ended tractor

RGS™ (Rev-Guide System) is the AC reversible driving system on a rotating turret; it allows you to invert the driving direction in just a few seconds for efficient operation with rear or front mounted implements. The operator simply turns the seat/steering wheel/dash/pedal assembly through 180° to obtain a new driving position.


If the tractor is equipped with a joystick, all the auxiliary controls remain in an ergonomic position. The RGS™ system is an integral part of the tractor's multifunctional character, simplifying use and improving operating precision and quality.





## PLUS

- + **Comfort:** simple and intuitive RGS™ system, with dual controls
- + **Implement visibility:** driving position located in the centre of the tractor in all situations
- + **Versatility:** greater productivity

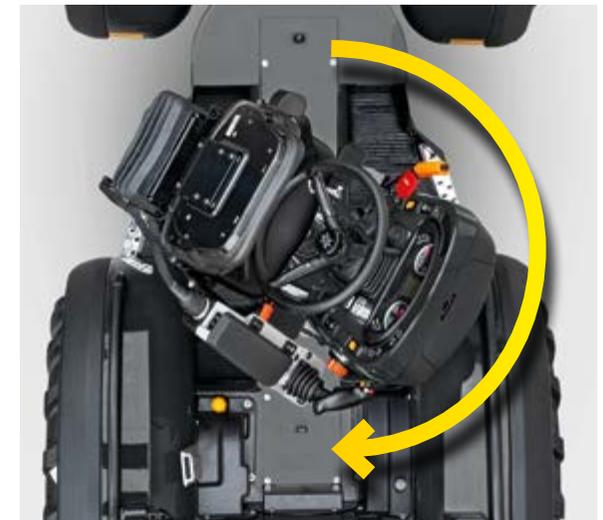




**STEERING:**  
precise and tight

**AGILITY PRECISION SPEED**


The extraordinary agility of Mach 4 results from the ACTIO™ articulated chassis which allows tight turns and precision manoeuvres in confined spaces.

Unlike conventional crawlers which pivot turn, causing significant damage to headlands, the Mach 4 barely marks the ground when executing tight turns, as the rear tracks follow the lines of the front tracks. The Mach 4 steering system stays efficient for longer, as manoeuvres, including headland turns, are performed by the frame without use of the brakes. The steering brakes (which for this very reason are optional) are only used as an extra aid when manoeuvring in the most difficult conditions.

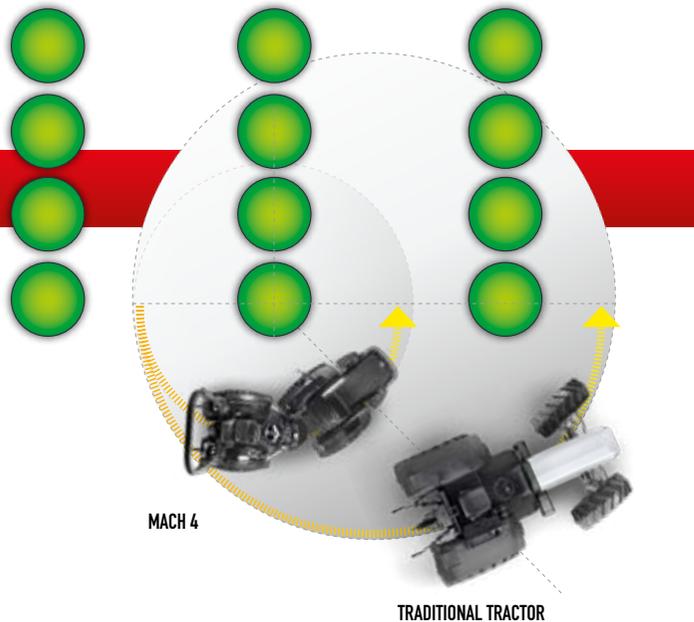

# DRIVE:

like a multi-wheeled tractor

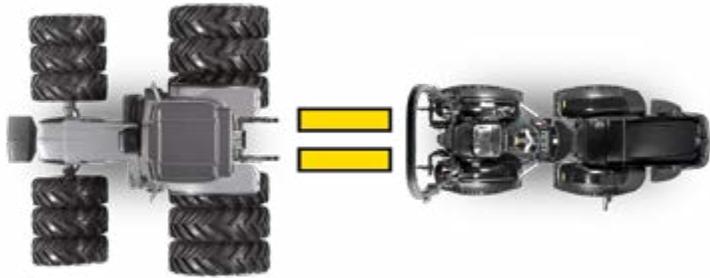


The four alternate-grip rubber tracks (w: 13,78 in), similar to "ground profile" tyres, assure constant adherence during all manoeuvres, even on slippery ground.

This special traction is enhanced by the finely-tuned engine and the "projecting" engine configuration of the vehicle. These cutting edge technical solutions ensure the traction is equal to that of a multi-wheeled vehicle of the same size.



## TRACTION ON ROUGH TERRAIN

The traction remains constant even while changing trim during work on extremely uneven ground, thanks to the superior weight distribution area on the two front axles compared to a traditional tracked vehicle. This prevents the tracks from skidding on slippery terrain and damaging the topsoil and headlands.

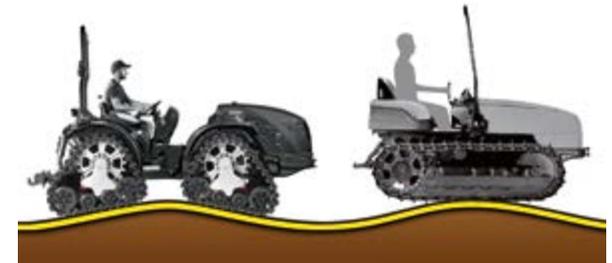

MACH 4

TRADITIONAL TRACKED VEHICLE




## PLUS

- + Greater stability and safety
- + Increased capacity of carrying loads uphill
- + Ground recovery work no longer necessary
- + Reduction in working times

## FOUR INDEPENDENT TRACKS FOR UPHILL SLOPES

Unlike a traditional 2-track tracked vehicle, Mach 4 features 4 independent rubber tracks each of which independently follows the contour of the ground. The traction remains constant even uphill as the mass is also distributed on the front axle.

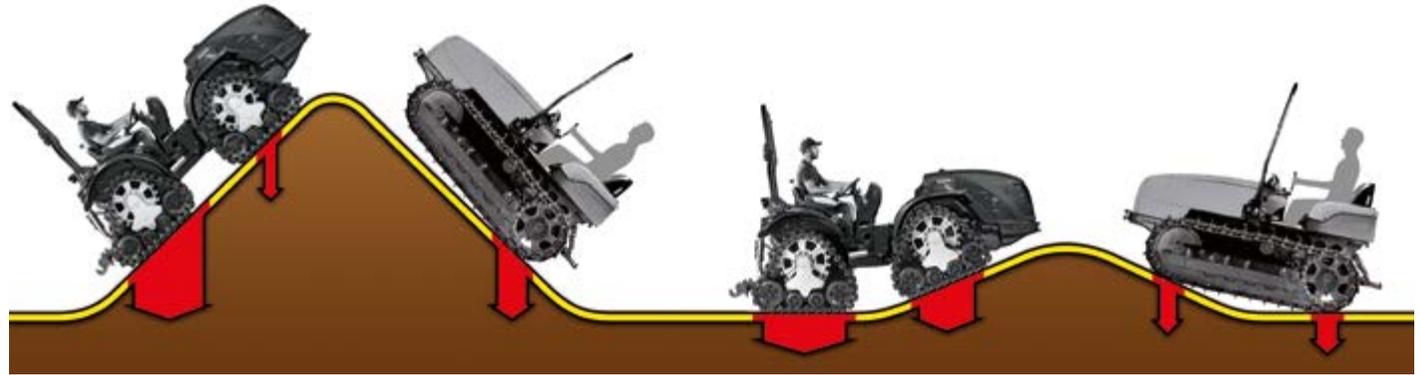

## ADHERENCE TRACTION SAVING



**NO SKIDDING**



**LOWER FUEL COSTS**



**TIME SAVINGS**



**SAVING IN GROUND DAMAGE REPAIRS**



**MONEY SAVINGS**

# SPEED:

up to the permitted maximum

The Mach 4 has dual homologation for road use: up to 18,64 mph with increased load, or up to 24,85 mph (optional), the maximum speed permitted by the highway code. Field and road transfers can therefore be effected at greater speed, reducing downtimes and operating costs. Safe and comfortable to drive at all times, thanks to the permanent grip provided by the four tracks.

24,85  
mph

## PLUS

- + *Can travel on roads*
- + *Reduced journey times*
- + *Maximum operator comfort*
- + *Lower fuel consumption and reduced running costs*



# STABILITY:

anywhere, constant

The stability of Mach 4, a byword for operating safety, is assured first of all by the low centre of gravity, determined by the distribution of the mass. The ground clearance (12.8 in) allows for comfortable work even if the tracks sink into particularly crumbly or wet terrain.

The driving comfort, comparable to that of a traditional tractor, does not feature the discomfort typical of traditional tracked vehicles: the constant ground adherence of the rubber tracks makes it possible to cross bumps without excessive jolting or jerking for the operator. The rubber tracks move forward independently in proportional synergy, gently following the contour of the terrain.

MACH 4



# SAFETY:

## full compliance with the Mother Regulation

From January 2018, a new standard, known as the "Mother Regulation", has unified all the structural and construction criteria for every tractor produced in Europe. Antonio Carraro has taken this opportunity to enhance the new R Series with numerous additional features designed to guarantee the safety of the operator and also to improve comfort and the user experience.

These features include an improved roll-bar, which can now be raised and folded without the aid of any tools, and the addition of two new rear-view mirrors (one per side), positioned in line with the roll-bar. The controls are now colour coded according to function: red to shut off the engine, orange for driving and parking, yellow for the power take-off and dark colours for the hydraulic system and linkage.





## SAFETY

Safety, however, is always top priority for AC: low centre of gravity, constant traction, stability, efficient braking, protection of the driving position — these are some of the so-called “active” safety features. These are combined with “passive” safety elements, such as the quality of the components, the design, the choice of environment-friendly engines.

The braking system, comprised of four oil-immersed disc brakes with hydraulic control, requires no adjustment and guarantees a modulated braking action even stopping suddenly. Thanks to the high standards reached, the tractor can be approved for a maximum speed of 24,85 mph.

The electrohydraulic differential locks, rear or simultaneous on both axes, prevent wheel slip to maintain traction at all times. Cab and roll-bar are designed and tested to protect the operator in the event of the tractor overturning.




# COMFORT:

the equal of an open field tractor



From the streamlined, nimble styling to the easily accessible driving position, where we find re-imagined controls, storage compartments and a comfortable seat with mechanical or air suspension: everything on the R series is designed to ensure maximum comfort for the operator, who can now enjoy a driving position equivalent to that of a large open field tractor. The on-board instrumentation is elegant, convenient and user-friendly: backlit anti-glare screen for night working, on-off information system, digital tachometer and PTO rev counter, and pushbutton electro-hydraulic controls.

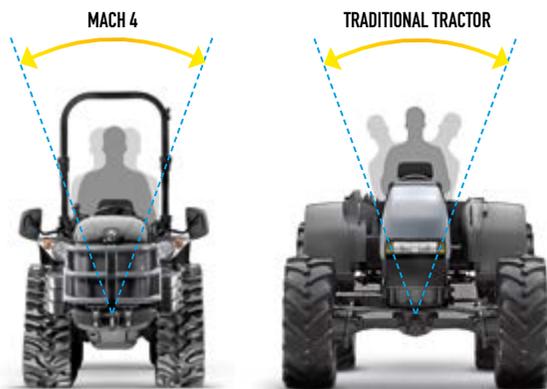

## PLUS

- + *Less jerking and jolting for the operator*
- + *More stable movement*
- + *More efficient work with equipment*
- + *Lower operator stress*





The lighting system, incorporated in the mudguards, features parabolic reflector units for a longer view of the track ahead, the implement and the surrounding area. Servicing is quick and easy thanks to the fully-opening bonnet and easily removable engine compartment side panels and battery cover.



### Longer platform

The result of a major innovation and design process, the driving position of the new R Series is simply fantastic.

The platform is the product of in-depth research into the working conditions of the specialised agricultural operator. The dimensions of the platform have been increased so as to make it easier to work with the reversed driving position, and the transmission tunnel has been lowered to give more legroom. The longer wheelbase, a natural consequence of the longer platform, improves driving comfort while reducing pitching movements during road transfer and increasing stability on slopes.

Special care has gone into the choice of materials to reduce vibration to minimum and increase acoustic and thermal insulation of the driving position, while also isolating it from the transmission. The silent block platform mountings have been enlarged to ensure they continue to perform well over time.



## Bonnet dimensions unchanged

A meticulous engineering study has enabled us to install the larger Tier 4 final engines in the same space as the previous propulsion units. The dimensions of the bonnet are unchanged, making the vehicle easy to operate in confined areas while maintaining good forward visibility.



The engine compartment is easy to inspect thanks to the wide opening bonnet. The cooling pack hinges outwards to facilitate engine maintenance. For applications where the front grille frequently gets blocked with debris (such as haymaking, flail mowing or defoliation), the ACS (Automatic Cleaning System) reversible flow fan is available.



\*optional



# STABILITY

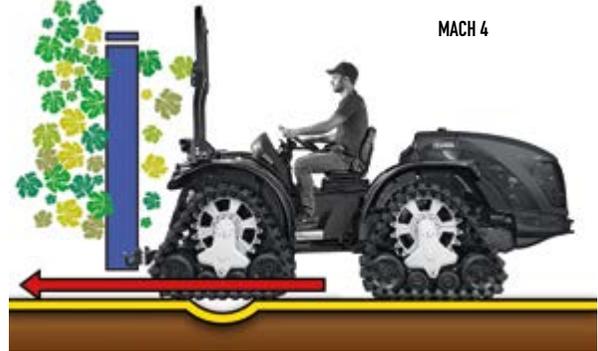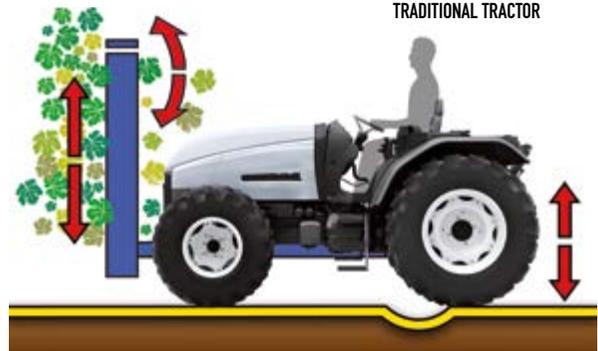

## New controls layout

The controls and, in particular, the levers have undergone an extensive ergonomic design process to improve operating efficiency.

The optional e-Drive transmission eliminates the shuttle and range control levers from the central transmission tunnel, thereby further improving operator comfort. The pedals have been made larger and shaped to make them easier to use with safety footwear.

## Steering turret and dashboard

The result of in-depth research into operator posture, the dashboard is tapered and shaped to leave plenty of room for the drivers knees and to avoid restricting the legs when working on rough terrain or slopes. The fuse compartment, diagnostics socket and brake fluid reservoir are all located on the top of the dashboard. The battery disconnect switch, integrated and well-protected, is always within easy reach.

We have also positioned the Cruise control switches around the multifunction panel; with these you can set and call up two engine speeds, which, depending on the gear engaged, correspond to two specific travel speeds. We also find the buttons for disengaging four-wheel drive and for activating the power take-off.

The multifunction panel is comprised of a central display that communicates with the engine via the CAN Bus, providing information on speed, fuel consumption, diagnostics and other parameters.

## Seat

The tilt-adjustable steering wheel is complemented by the comfortable, reversible seat. Equipped with retractable seat belts, it is also available in a pneumatic version, with continuous adjustment of height and driver weight between 110,23 and 286,6 lb.

Both the roll bar and cabbed versions are equipped with a number of useful storage compartments for your phone, keys and other items.





# TRACTOR AND IMPLEMENT:

## technology in harmony

The three-point linkage, hydraulic system and power take-off are all devised to meet the requirements of a wide range of implements and have been re-designed to increase operator comfort and reduce working stress.

The rear lift is a single unit with vertical cylinders, equipped with a dedicated pump and hydraulic system; available also in an electronic version, it allows the implement to follow the contours of the terrain without bumps and jolts. It is equipped with extendable bars and adjustable quick couplings (Cat. 2). At the rear of the tractor we find a 7-pole trailer socket and a 3-pole socket.

The front lift (optional) provides the possibility for combined operations using front and rear implements, but does not alter the profile of the bonnet when not in use.





**POWER LIFT**

Auxiliary rear hydraulic remotes with 3 distributors (2 double acting and 1 single acting), 1 oil reflow.



**3-POINT LINKAGE**

Adjustable lifting arms with Cat. 2 and Cat. 1\* quick coupling with adjustable width.



**RAISED 3-POINT HITCH\***

For a lifting geometry favourable to the adjustment of the implements.



**PTO LEVER**

This command selects the PTO shaft in independent or synchronised mode.



**CONTROL TO KEEP PTO RUNNING**

This control keeps the PTO engaged and running even when the operator leaves the seat.



**POWER TAKE-OFF**

PTO shaft with operating ranges 540/540E and standard.



\*optional



## WORKING EQUIPMENT

At the rear of the R Series MACH 4, everything is designed to improve operator comfort, thanks also to a number of key features:

- » New attachment and increased extension for the hydraulic top link
- » Lift arms with adjustable length and adjustable hooks as standard
- » Work light
- » Hydr. service couplers integrated in the mudguards
- » Engagement facilitated by the cardan shaft
- » The PTO can be engaged while the tractor is moving
- » Hydraulic system with two load sensing pumps with independent circuits and heat exchanger



## VERSATILITY





#### **DIFFERENTIAL LOCKS CONTROL**

The front and rear differential lock prevents slipping and optimizes traction. The front traction disengagement is useful when working on delicate grounds.



#### **ELECTRONIC LIFT CONTROL\***

Electronic position and draft control of the linkage with integrated maximum lifting height, rate of drop and damping control. Located in a control console including a lid that can be opened.



#### **HYDRAULIC VERTICAL LIFT ROD AND TOP-LINK\***

Hydraulic lift rod and top link to allow adjustment from the driving seat.



#### **HYDRAULIC SYSTEM**

Auxiliary rear hydraulic remotes with 2 double-acting (1 floating) and 1 single-acting distributors, plus 1 oil reflow with 6 rear hydraulic outlets + 2 double-acting with 4 electriccontrolled mini-outlets.

**Electro-proportional\*** hydraulic system controlled by joystick with double driver safety system and integrated control unit with user-adjustable settings -12 rear quick couplings.




#### **EXTERNAL CONTROLS OF THE POWER LIFT UNIT\***

Raise and lower the rear power lift unit (with driver on the ground at the side of the machine) during hitching of the carried interchangeable tool.

# DAMPING:

stability at all times


The Damping system, which is fitted as standard equipment and, when activated, compensates for stresses transmitted from the mounted implements, thereby increasing comfort while protecting both driver and machine from possible harm.

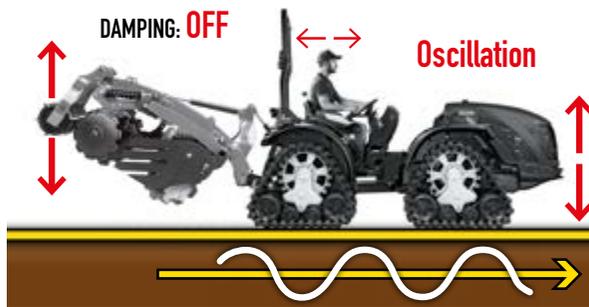

# FLOATATION: minimum compaction

The "floatation" of the vehicle on the ground surface allows for excellent use of Mach 4 all year long, making it possible to work on wet, muddy, marshy, crumbly, snowy and sandy terrains.

The perfect weight distribution on the rubber track treads makes for minimum compaction, inferior to that of footprint.

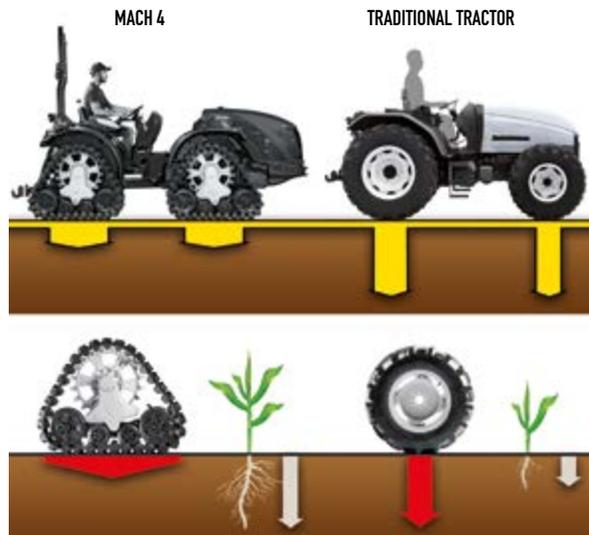

# OPTIONAL



## FRONT LIFT

Used together with the bullbar and 1 double-acting distributor, it allows all the frontal equipment to be used.



## PTO

- Gearbox with PTO 540-1000 rpm
- Gearbox with PTO 540-540S rpm



## ELECTRONIC LIFTING

Electronic lifting at controlled position and effort with damping for road transfer.



**FABRIC GRAMMER SEAT**

Air suspension with load display  
- reclining backrest - lumbar support.



**PNEUMATIC SEAT**

Latest generation with air springs.



**HEADLIGHT GRILLES**

Protecting the light assemblies, they also make the bodywork look more appealing.



**BULLBAR**

Tubular steel guard protecting the bodywork; integrates the third-point for the front lift.



**FRONT BALLAST**

Perfectly integrated into the bodywork of the tractor; it does not alter the wheelbase or dimensions of the tractor.



**RAISED 3-POINT HITCH**

For a lifting geometry favourable to the adjustment of the implements.



**STEERING BRAKES**

Steering brakes have been introduced to further reduce the turning radius.



**VERTICAL TIE-ROD AND HYDRAULIC THIRD-POINT**

Optimizes the positioning and inclination of the equipment.




**HYDRAULIC SUSPENSION**

Hydraulic suspension on the UNIFLEX rear powerlift.



**ACS (Air Clean System)**

Engine cooling fan with air flow reversal. Reduces the need for cleaning the front grille, ensuring more constant engine cooling.

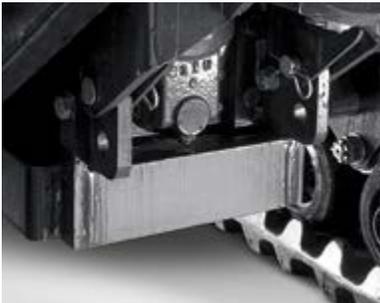

**BALANCING BALLAST**

Supplementary ballast for optimising vehicle balance.



**QUICK RELEASE FLAT FACED COUPLINGS**

Easy engagement; no oil spillage and better cleaning.



**FRONT QUICK RELEASE COUPLINGS**

Front powerlift > 6 couplings replicated on the rear, of which 2 with double effect + 1 electronically adjustable continual delivery and 1 simple effect.



**HYDRAULIC SYSTEM**

Electro-proportional hydraulic system controlled by joystick with double driver safety system and integrated control unit with user-adjustable settings - 12 rear quick couplings. External lifting control.





# AIR CAB

**ROPS and FOPS homologated,  
pressurised and Category 4  
certified**

The AIR\* cab offers maximum level operative comfort and safety. The tractor and cab's volumetric profile is harmonious and streamlined in order to grant agility and ease of movement in tight spaces and dense vegetation. To guarantee a perfect working climate there is the efficient heating and ventilation system with an integrated air-conditioning system. It has excellent all round visibility thanks to the cab's many windows on all sides along with a porthole at the same height as the pedal board providing visibility over the ground. The internal illumination allows for the tractor to be used comfortably even at night with constant control over all the functions.

The finely tuned soundproofing and the uncoupling of the cab from the tractor's main body guarantees minimum noise levels when being driven. The operator's living space provides great freedom of movement for the legs.



The powerful external lights positioned on the roof, together with the headlights on the tractor's mudguards provide a great strip of light that illuminates the ground in the day and which also allows the operator to work in conditions of pitch black. The Air cab was designed to always be "pressurised" and on request it is possible to have it Cat. 4 certified which guarantees the perfect isolation of the operator from dust, gas and aerosols in full accordance with the European legislation "**UNI-EN 15695- CAT 4**".



optional

# ///AIR



## » DESIGN

Integrated with the driving seat, soundproofed and thermally isolated.

## » VISIBILITY

On all fronts thanks to the essential structure of the uprights, with curved windows.

## ERGONOMICS

- » The driving seat is ergonomic and comfortable with easy access; all the controls, positioned on the control tower of the reversible drive system, keep their drive setting even in reverse; the controls of the transmission are replicated on the armrest of the multipurpose proportional joystick JPM+(inverter; Cruise Control; speed ranges; Eco Mode Speed; suspension control, etc.).

## COMFORT CERTIFICATE



- » The heating and pressurisation system (Certification Cat.4: operator protection from dust, gas and aerosol) is controlled electronically with a display positioned on the cab's roof; FOPS and ROPS homologation.

## PRESSURISATION

- » Each purchaser can choose their optimal level of protection up to Category 4 (maximum level of operator isolation from harmful dust, gas and aerosols).

## RUNNING COSTS

- » The internal and external illumination system with led guarantees minimum energy consumption; up to 8 external work headlights\*.

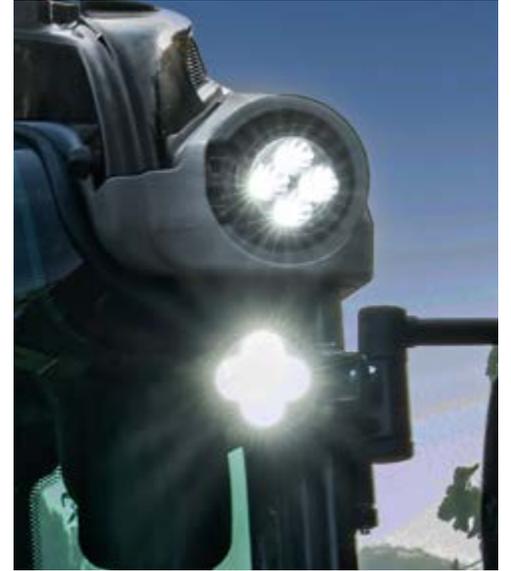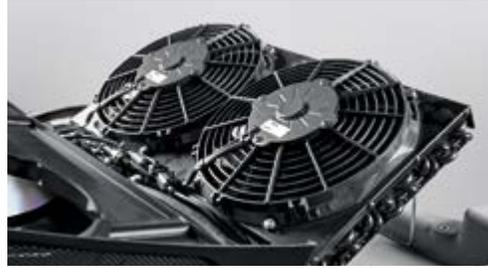

\*optional

# JMC

JOYSTICK MULTI CONTROLLER





The JMC™ proportional joystick (optional) has been developed in accordance with innovative design criteria to improve ergonomics and flexibility and to provide a practical means of controlling the lift and front and rear hydraulic couplers. It also allows the operator to proportionally control the flow of oil to the hydraulic couplers and the lift, thereby ensuring total control of the speed and movement of implements, as well as the raising and lowering of the lift. The result is absolute working precision.

The flow control of the hydraulic coupler with continuous flow controls the operation and speed of the hydraulic motors.


Thanks to the rate of drop control, you can set the maximum implement lowering speed without affecting the raising speed.

Flexibility to adapt to different types of application is guaranteed by the possibility to change the control functions assigned to the buttons.

So many different functions at your fingertips, and simple to use thanks to the colour-coded buttons.

### JMC buttons


- 1 Control joystick
- 2 Continuous flow activation
- 3 PTO activation/deactivation
- 4 Continuous flow activation of 1 single-acting
- 5 Single-acting and electrical pulse
- 6 Lift float control
- 7 Hydraulic flow control
- 8 Activation and calibration of UNIFLEX hydraulic suspension\*

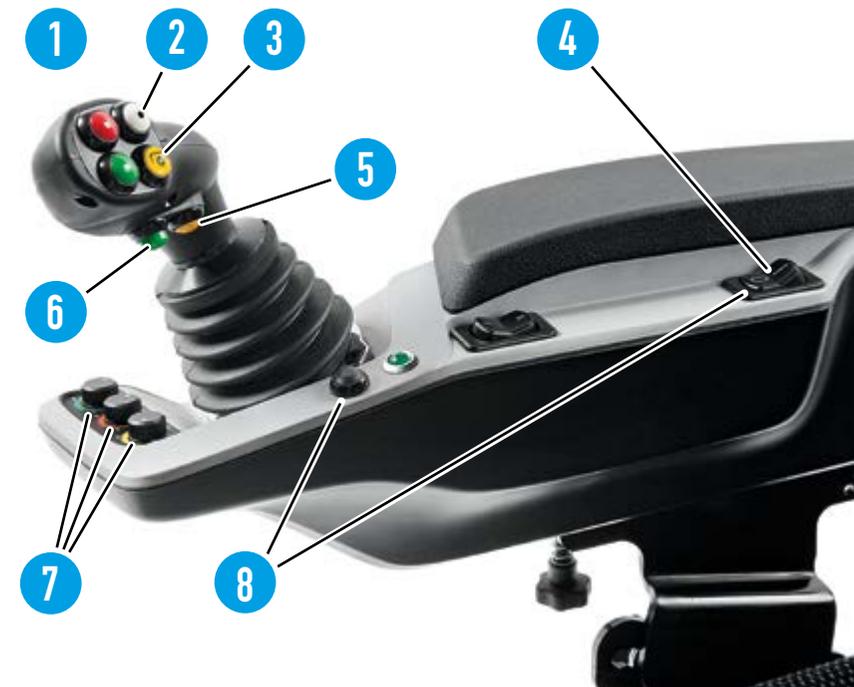

\*optional




# UNIFLEX® SUSPENSION



The Uniflex\* suspension with electronic control transfers part of the weight of the implement on the wheels. The reduced ground pressure has many benefits:

- » reduced soil compaction
- » less resistance for towing and pushing
- » more grip and stability
- » greater productivity
- » reduced fuel consumption
- » reduced oscillation during road transfer

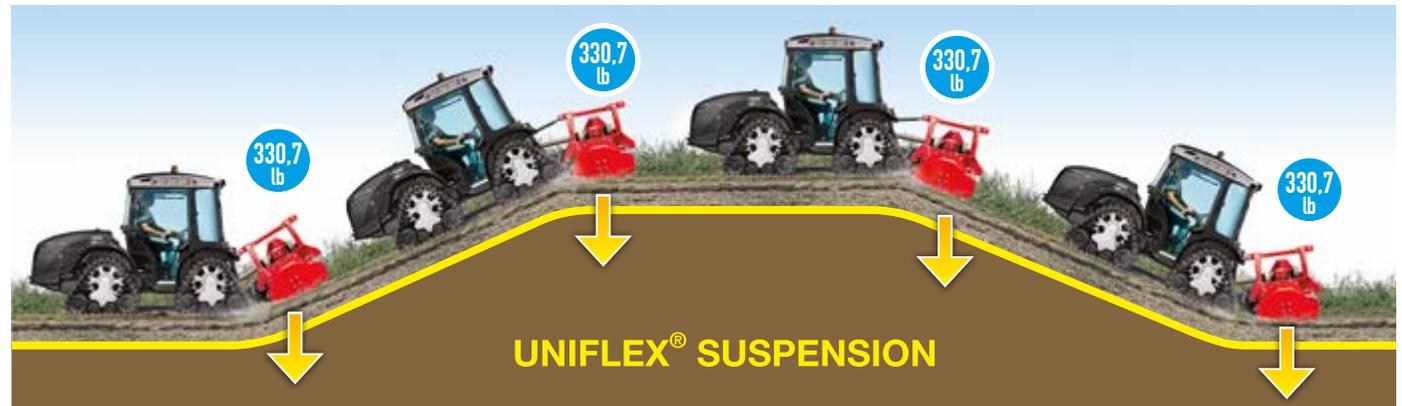

\*optional



# TRANSMISSION:

## sixteen synchronised ratios

The R series models are equipped with a gearbox with helical gears, with 16 forward ratios and 16 reverse, which can also be engaged when the tractor is moving, thanks to the synchronised shuttle. The very narrow difference between one gear ratio and the next translates into smooth, fluid driving in all operating conditions

The large diameter clutch, which affords reliable, smooth operation, requires no adjustment thanks to the hydraulic control system with wear compensation.


### PLUS

+ **Reliability:** long clutch life

+ **Efficiency:** wide range of ratios

+ **Comfort:** smooth engagement without jerking

+ **Savings:** reduced fuel consumption and operating costs

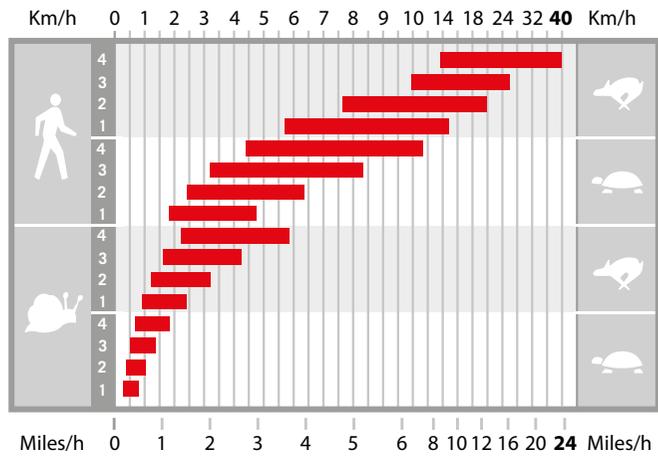

## e-Drive Transmission

The transmission with the e-Drive\* shuttle control on the steering wheel is especially practical in all those applications where frequent changes of direction are required, such as materials handling using the front fork or shovel attachments. Positioned on the left side of the dashboard, it is easy to operate, in combination with the clutch, without taking your hand off the wheel: this ensures easy changes of direction are performed in complete safety.



\*optional



# ENGINE:

## controlled power

The four-cylinder, 74,2 HP engine installed on the MACH 4 combines reliability, top performance and fuel economy. Moreover, the engine is perfectly integrated with the transmission through a CAN Bus connection, which allows a continuous exchange of information between the various electronic control units of the tractor. This means it is possible to optimise engine performance to obtain the best engine speed for the load.

Common Rail Turbo technology meets Tier 4 Interim standards as well Mother Regulation requirements, while maintaining the same low profile and volumetric size as the models of the previous series.



### PLUS

- + **Reliability:**  
*Quality of components*
- + **Performance:**  
*Maximum efficiency*
- + **Comfort:**  
*Minimum vibrations, noise, and emissions*
- + **Saving:**  
*Less maintenance costs*  
*Rapid amortisation*  
*Lower fuel consumption*



# TECHNICAL DATA: MACH 4 R

<b>Chassis</b>	"ACTIO™" – Full chassis with oscillation • Articulated • Reversibility RGS™ • 4WD quadtrack	
<b>Engine Type</b>	Diesel direct injection Common Rail with counter rotating weight system Emissions Regulations: Tier 4 final      N° Cylinders: 4 - 16 Valves • Turbo Displacement (CC): 3769                      Power kW/HP (97/68/CE): 54,6/74,2 Maximum engine revs: 2400                  Torque max (Nm/revs): 330/1500 Cooling: Water                                  Tank Capacity (gal): 13,21	
<b>Transmission</b>	32-speed synchronised gearbox: 16 forward + 16 reverse gears with synchronised shuttle	
<b>PTO</b>	Rear, independent 540/540E rpm, synchronised in all gears Oil-immersed multiplate clutch with progressive electro-hydraulic engagement	
<b>Shaft</b>	Profile 1" 3/8 with 6 splines with facilitated engagement	
<b>Transmission clutch</b>	Hydraulic control	
<b>Drive disengagement</b>	Electrohydraulic control on the front	
<b>Hydraulic system</b>	2 double-acting remote valves + oil return 2 pumps with independent circuits	
<b>Rear power lift</b>	With 3 point hitch Damping function for road transfer Adjustable lifting arms with Cat. 2 quick release couplings with adjustable width Height adjustable rear towing device "EEC" type - Front towing device Operating Pressure (bar): 160 Lifting capacity (lb): 5.291,09	
<b>Steering</b>	Hydraulic with 2 pistons	
<b>Brakes</b>	Hydraulic front/rear oil bath disc brakes; independent hydraulic rear steering brakes Automatic emergency and parking oil bath brakes on transmission	
<b>Platform</b>	Suspended on Silent Block	
<b>Weight in order of speed:</b>	With roll bar (lb): 6.944,56	With AIR cab (lb): 7.275,25

## STANDARD FEATURES

- Reversible driving position with servo-assisted reversibility
- Rear or front/rear differential lock with electrohydraulic control
- Suspended controls
- Adjustable steering wheel with reverser embedded
- Adjustable, suspension seat with safety belt with automatic retractors
- Rear safety roll bar
- Digital multifunctional dashboard with display and diagnostic function
- Engine rpm control with double memory (Cruise control)
- Battery
- Battery isolation switch
- Electrical power point
- Start inhibit switch on shuttle reverser, PTO selector and seat
- Adjustable rear work spotlight

## OPTIONAL

- "AIR" cab FOPS and ROPS- certified cab
- Soundproof platform with thermal insulation
- Roof with rear skylight
- 2 rear and 2 front work LED spotlights
- Air conditioning system with cooler and heat exchanger and inner air re-circulation
- Additional front/rear working LED lights
- Suitable for category 4

- E-DRIVE transmission with shuttle control on steering wheel and electro-hydraulic range shift
- Hydraulic power lift with electronic draft and position control power lift with damping
- Higher 3 point linkage
- Support with six front ballast weights
- Hydraulic third hitch and vertical tie-rod
- Front power lift
- Gearbox with PTO 540-1000 rpm
- Gearbox with PTO 540-540S rpm
- Hydraulic system with hydraulic pump up to 51 liters/min
- Electro-proportional hydraulic system controlled by joystick with double driver safety system and integrated control unit with user-adjustable settings
- 11 rear quick couplings - UNIFLEX hydraulic suspension on the rear power lift with control and settings on display
- Quick release couplings Cat. 1
- Pneumatic seat
- Fabric Grammer seat with air suspension and load display, reclining backrest, lumbar support
- Front bullbar
- Front lamp guards
- ACS fan with reversible air flow to clean the radiator
- "Superbrake" braking system
- Steering brakes
- Couple of pads for front tracks
- Road approval up to (24,85 mph)

# DIMENSIONS



# SAT:

## Customer Service Team



### ANTONIO CARRARO® ORIGINAL SPARE PARTS AND ASSISTANCE

The AC dealer network utilizes modern equipment and instruments that have been especially designed and built for maintenance work on AC tractors. The technicians at every authorised dealership periodically attend technical training courses at the Parent Company's facilities. Each authorised workshop employs highly qualified staff and provides an extensive range of services in order to offer its Customers maximum peace of mind and total protection. AC dealers can give their Customers information on all the services related to the care of AC tractors.

### AFTER-SALES SERVICE

Thanks to the capillary network of dealers and the competence of the Service Managers, the Parent Company can assure all-around skills. With the right maintenance work, every AC tractor will continue to provide excellent performance throughout its operating lifetime.

### ORIGINAL ANTONIO CARRARO SPARE PARTS

Original Antonio Carraro Spare Parts is a registered trademark. The elevated standards of design and the stringent tests carried out during the entire production process assure maximum quality levels. With Original AC Spare Parts, Customers can be certain of maintaining tractor performance unaltered over time, thus preserving the safety and the value of the tractor.



### XG MAXIMUM PROTECTION: 4 years without worries!

As a proof of its reliability, Antonio Carraro offers, in addition to its two-year standard warranty, an extension of warranty coverage up to three or four years, called **EXG Maximum Protection**. At the time of purchase or within the first 24 months of the tractor's life (during which all scheduled maintenance services must be performed as recommended in the AC Use and Maintenance Manual), Customers may apply for either a three- or four-year extended warranty, according to their needs. Whatever coverage they choose, Customers are recommended to have all

service performed at any of the **authorised locations of our global dealer network**, where repairs will be carried out by highly qualified personnel using only **AC Original Spare Parts**. In case of sale of the tractor, the warranty coverage may be transferred to the new owner.







N° 1 SPECIAL TRACTORS

**DEALER:**

**ANTONIO CARRARO SPA**  
**Via Caltana, 24**  
**35011 Campodarsego Padova ITALY**  
**hello@carrarousa.com**  
**carrarousa.com**



Copyright © all rights reserved to Antonio Carraro